
# **NBP 0522**

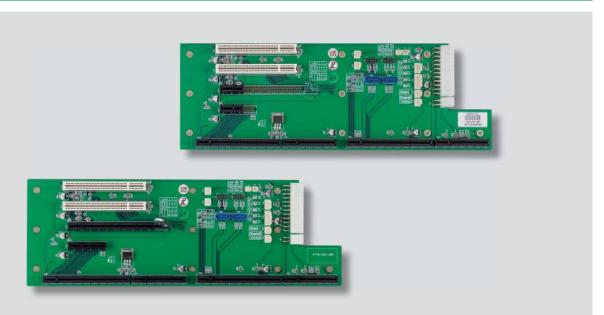

### **Main Features**

- Designed for PEAK870 and PEAK872
- Support 1 PCIe x16/1, 1 PCIe x4/1 and 1 x Full-sized PCI Add-on card
- Compatible with PCIMG 1.3 board

## **Specifications**

## **System Architecture**

• For 5-slot chassis

#### **Dimensions**

• 317.5mm(W) x 110.7mm(L)

#### Slots

- PICMG 1.3 (SBC slot)
- 1 x PCle x16 (default as PCle x1)
- 1 x PCle x4 (default as PCle x1)
- 2 x PCI 32bit/33MHz

#### **Power Input**

• 1 x 24-pin Power connector

#### **Environment**

- Operating temperature: 0°C to 60°C
- Storage temperature: -20°C to 80°C
- Relative humidity: Operating 10% to 90%, non-condensing Non-operating 5% to 95%, non-condensing

#### Certifications

- CE approval
- FCC Class A

## **Ordering Information**

• NBP 0522 (P/N: TBD)
PCIMG 1.3 w/ SBC slot, 1 x PCIe x1, 1 PCIe x1, and 2 x PCI slot

# **Dimension Drawing**

